


APPLY TACK ON
GROUND PAVEMENT
SURFACE. SURFACE
COURSE SHALL BE
TYPE III C3-PG64-10 AC

GRIND AND PAVE

SAWCUT EXISTING
PAVEMENT AND APPLY
HEAVY ASPHALTIC TACK
COAT ON SAWCUT FACE.

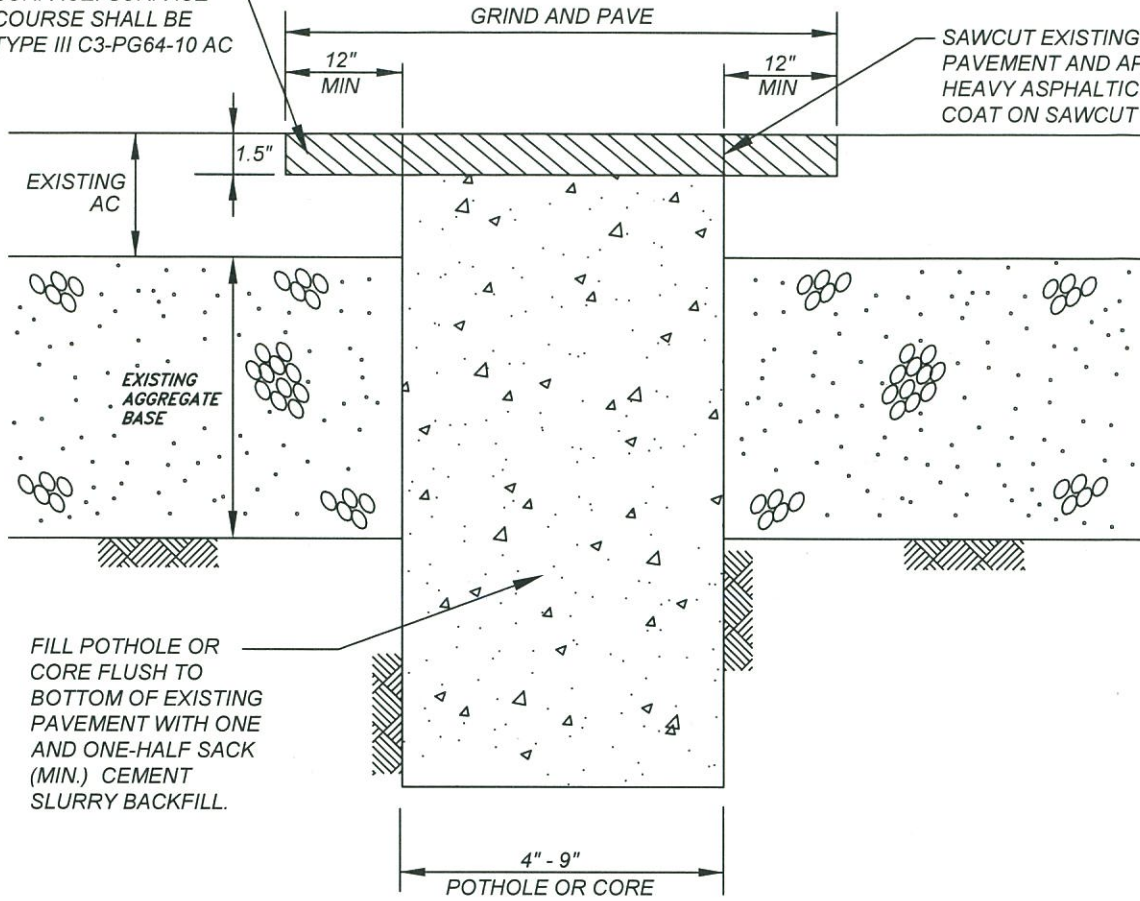

FILL POTHOLE OR
CORE FLUSH TO
BOTTOM OF EXISTING
PAVEMENT WITH ONE
AND ONE-HALF SACK
(MIN.) CEMENT
SLURRY BACKFILL.

NOTE:

WHEN MULTIPLE POTHOLES SPACED 24" OR LESS ARE RUN PARALLEL TO THE TRAFFIC LANE, STANDARD PLAN MBSI-132A SHALL BE USED.



DATE REVISED
02-07-2019
07-24-2019

**CITY OF MANHATTAN BEACH
DEPARTMENT OF PUBLIC WORKS**

UTILITY POTHOLE OR PAVEMENT CORE REPAIR

APPROVED BY *[Signature]*
PREM KUMAR, CITY ENGINEER
7/24/19
DATE

STANDARD PLAN NUMBER
MBSI-131A-1
SHEET 1 OF 1